

### SPECIFICATION SHEET



#### ELECTRICAL SPECIFICATIONS:

Type	Unit	EMB-R1201B	EMB-R1203B	EMB-R1205B	EMB-R1212B
Rated voltage	V	1.5	3	5	12
Operating Voltage	V	1.2-3	2-5	3-7	9-15
*Rated Current (MAX)	mA	25	30	30	30
* Min Sound Output at 10 cm	dB	80	83	85	85
*Resonant Frequency	Hz	3100±500	3100±300		
Housing material	NORYL				
Operating Temperature	° C	-25 - +80			
Storage Temperature	° C	-30 - +85			
Weight	g	2.0			

\*Value Applying at Rated Voltage (DC).

#Value applying (Min. operating DC voltage)

DIMENSIONS UNIT:mm Tolerance:±0.5mm

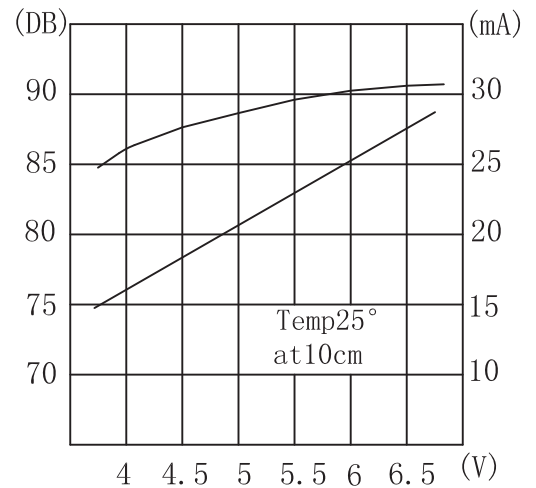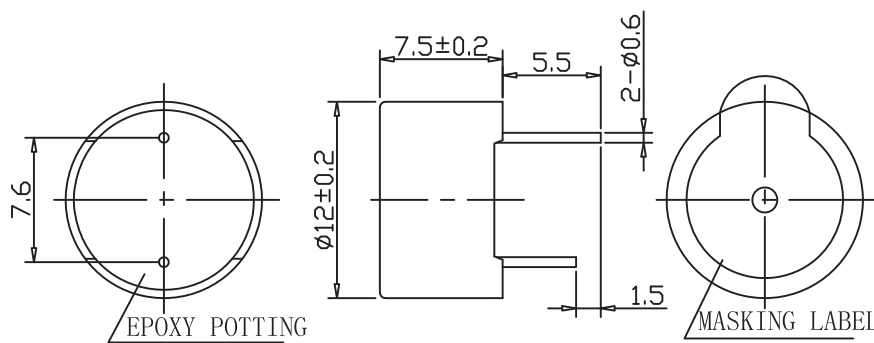

WAVE SOLDER AND WASH ALLOWED

*SANCO*

EMB-12xxB

Page 1/1

	NAME	DATE			
Drawing by	LITAO				
Checked by					
Approved by					

SANCO ELECTRONICS CO., LTD.