

SPECIFICATIONS SHEET FOR APPROVAL

PIEZO BUZZER
P/N: PB4333A12DAP-09

DESCRIPTION: D43mm, H33mm Piezo Buzzer, 2900Hz, 12Vdc,
90db at 60cm, dual tone (C/P), meet IP65 standard

VERSION: 01

DATE: 8-Nov-2023

REVISIONS

VERSION	DESCRIPTION	DATE
01	Released from engineering	8-Nov-2023

APPROVED BY :

CUSTOMER NAME :

DATE :

SPECIFICATIONS SHEET


PIEZO BUZZER
P/N: PB4333A12DAP-09

1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 60 CM	90	dBA
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE	3 – 30	Vdc
RESONANCE FREQUENCY	2,900 ± 500	Hz
*MAX CURRENT	20	mA
TONE (PLUSE RATE 60 +/- 30 TIMES / M)	Dual (C or P)	-
OPERATING TEMPERATURE	-20 to +70	°C
STORAGE TEMPERATURE	-30 to +80	°C
HOUSING	ABS	-
WEIGHT	40	g

*Value applying rated voltage

2. DIMENSIONS (unit in mm)

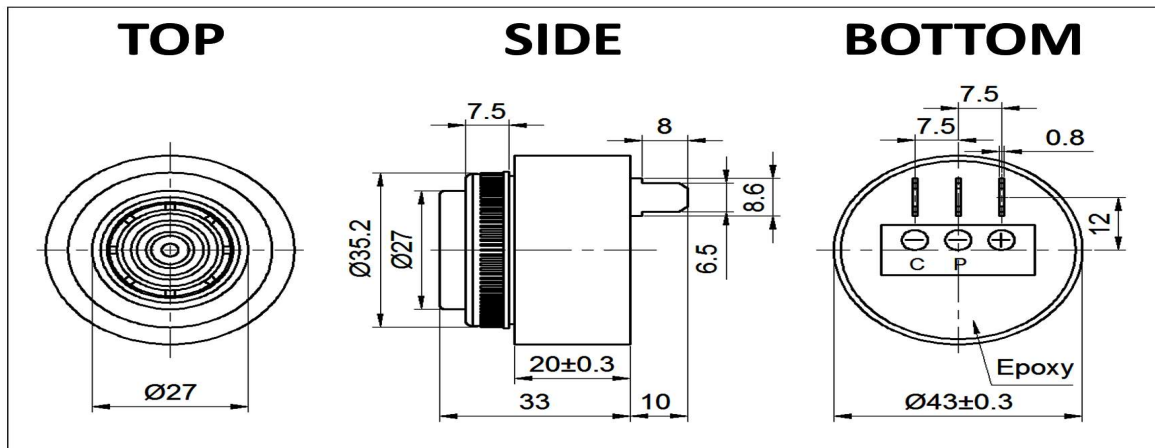

Tolerance: ± 0.5 mm except specified

VERSION: 01

DATE: 8-Nov-2023

All specifications subject to change without notice