



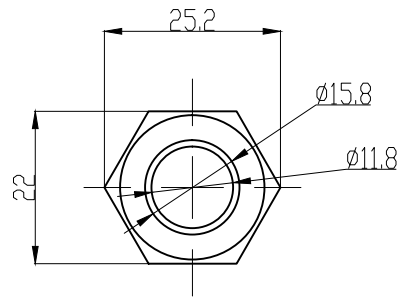





温州金宏电器有限公司

WENZHOU JINHONG ELECTRICAL APPLIANCE CO., LTD

J19-271R-12V

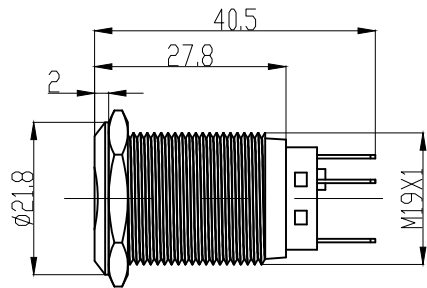

RATLNG: 5A 250VAC
 Contact Resistance: 50mΩ MAX
 Insulation Resistance: 1MΩ/min. at 500VDC
 Dielectric Strength: 1000VAC rms
 Electrical life: 100,000 cycles
 MECHANICAL LIFE: 300,000 cycles
 Operating Temperature: -30° C ~ 85° C.
 Operating Pressure: 2N ~ 5N
 Operating Stroke: 1.5mm ~ 2.5mm
 Protection Grade: IP67
 Soldering 300° C max. for 5 seconds
 Function: OFF (ON)
 Material
 Shell: stainless steel
 Nut: nickel plated brass
 Button: 316 stainless steel
 Base: PBTG30
 Terminals: copper plating gold
 Contact: silver tin oxide



Contact type

Switching Circuit

Install size

版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	版本 VER.