



Unit:mm

客户

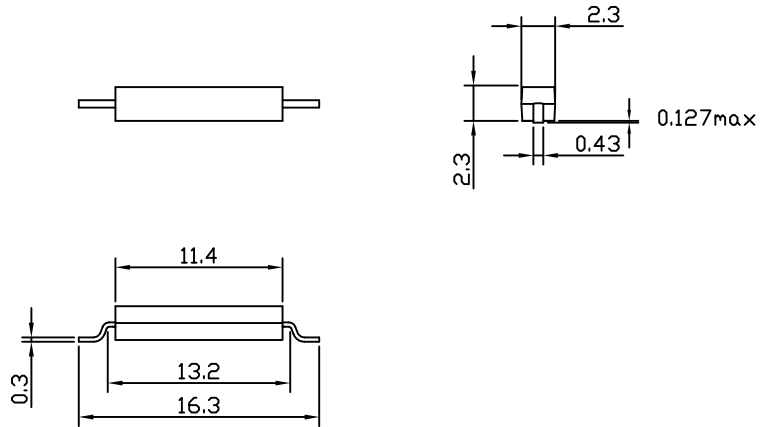

订购信息: Order Information

型号 Type	干簧管灵敏度 AT Range	触点方式 Contact Form
FRS-11A16SMDH0710	7-10	常开 (A)
FRS-11A16SMDH1015	10-15	常开 (A)
注: 卷盘包装: 2500个/盘 (2500pcs/reel)		

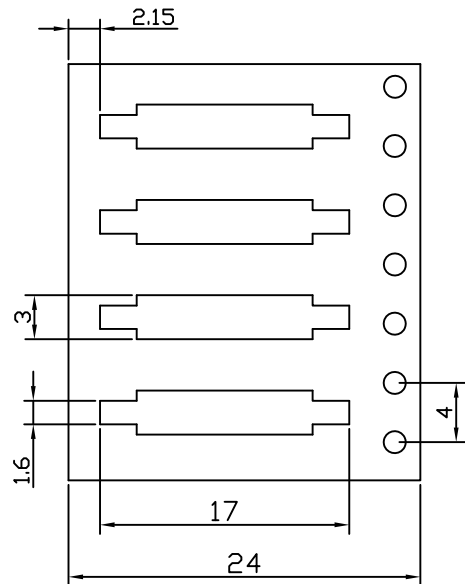

卷盘包装尺寸  
Dimensions for tape and reel

技术参数 SPECIFICATION

开关触点 Contact Form		常开 (A)	NINGBO KLS ELECTRONIC CO; LTD			
最大开关功率 Contact Rating - max.	W	10				
最大开关电压 Switching Voltage - max.	V	100				
最大开关电流 Switching Current - max.	A	0.5				
最大载流电流 Carry Current - max.	A	0.5				
最大接触电阻 Contact Resistance - max.	mΩ	150	TITLE 塑封贴片干簧管 Housed SMD Reed Switch			
最小击穿电压 Breakdown Voltage - min.	V	110/150				
绝缘电阻 Insulation Resistance - min.	MΩ	10000	PART NO. L-KLS7-FRS-11A16SMDH-0710		SCALE 2:1	REV. 00
工作温度 Operating Temperature	°C	-40~85	Drawn by ZXL / 2016-01-01	Reviewed by LJ / 2016-01-01	Approved by LY / 2016-01-01	