
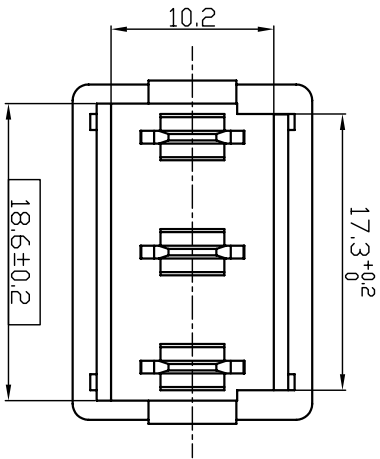


code: 1

开关电路 (Circuit)




开关安装面板 (Switch panel hole dim.)
X=面板厚度 (Panel Thickness)




X	Dim. Y	Dim. Z
0.75 to 1.25mm	19 ^{+0.1} ₀	12.9 ^{+0.1} ₀
1.25 to 2mm	19.1 ^{+0.1} ₀	12.9 ^{+0.1} ₀
2 to 3mm	19.2 ^{+0.1} ₀	12.9 ^{+0.1} ₀

开关安装孔 (Panel hole)

按钮颜色 (KNOB COLOR):
黑色 (black)

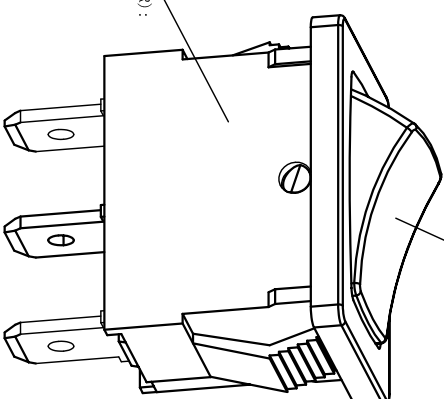


按钮颜色 (KNOB COLOR):
黑色 (black)

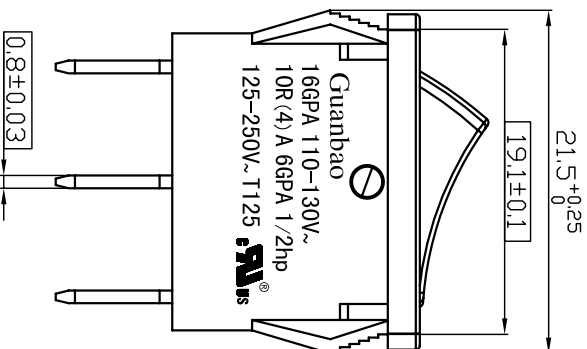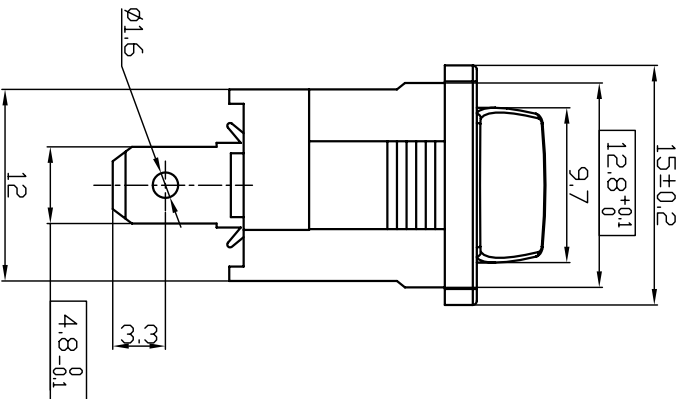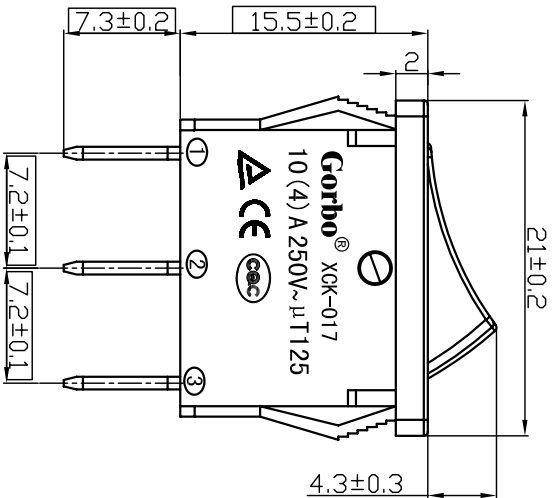

技术要求 (Technology require):

- 开关参数 (Switch rating):
CQC/TUV: 10(4)A 250Vac T125 IE4
UL: 16GPA 110-130VAC;
10R (4) A 6GPA 1/2hp 125-250VAC T125
- 材料及外观 (Material&outlook):
按钮 (Knob): 黑色 PA66, 94V-2, 移印: 0 - (Black PA66 94v-2, print: 0 -),
壳体 (Housing): 黑色 PA66, 94V-2, 移印: 0 - (Black PA66 94v-2, print: 0 -),
壳体上字/烫印 (On housing marking): 开关电流, 电压, 型号, 商标,
(Switch rating current, voltage, model, trade marking).
- 产品符合 (Switch Approval): RMS, REACH, PAHS.
- 开关耐压 (Switch hi-pot):
极与极 (P-P): 1500Vac 0.5mA 10S,
极与壳 (P-H): 3000Vac 0.5mA 10S.
- 开关绝缘电阻 (Switch insulation resistance): ≥7MΩ 500Vdc 1min.
- 开关接触电阻 (Contact resistance): ≤50mΩ.
- 开关操作应当顺畅, 过档清晰, 无卡滞 (The switch operation moving position is clear, no excessive position and stick).
- 开关功能: ON-OFF (Switch function: ON-OFF).
- 带“□”尺寸为重要控制尺寸 (with “□” essential quality dimension).

移印颜色 (Pad print color):
白色 (White)



第一次出图 (INITIAL RELEASE)			
01	--		
版次 (REV.)	参考 (REF.)	描述 (DESCRIPTION)	
名称 (NAME)	外形图: switch a-drawing	功能 (Function)	SPST-ON-ON
型号 (MODEL NO.)	XCK-017	绘图 (DRAW BY)	Laikunhua
物料编号 (Material No.)	XCK-017-175	比例 (SCALE)	NTS
公差除有特别要求外, 均按此规定执行: X: ±0.20; x: ±0.15; xx: ±0.10; ≤±1°; 单位: mm (Tolerance unless otherwise specified: X: ±0.20; x: ±0.15; xx: ±0.10; ≤±1° UNIT: mm)		日期 (DATE)	2011.06.21
冠宝电子有限公司 (GUANBAO ELECTRONIC CO., LTD.)		日期 (DATE)	