

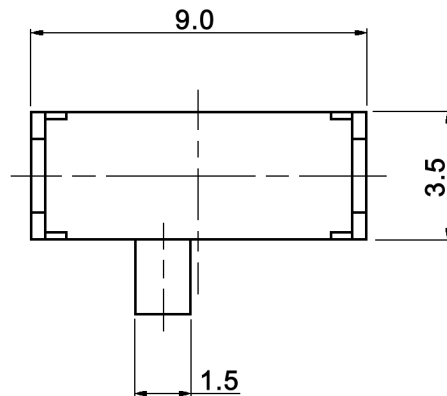


HOLE LAYOUT
TOP VIEW

⊙ 0.05



CIRCUIT DIAGRAM



Specifications:

- Contact rating: 0.3A, 6V DC
- Contact resistance: 70mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute +/-5sec.
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: 5 000 cycles
- Operating force: 200 +/-100gf
- Soldering conditions: 260 +/-5°C, 3 +/-0.5sec.
- Material: Terminal: brass, silver plated
Contact clip: phosphor bronze, silver plated
Case: PBT, black
Cover: stainless steel, natural
Slider: PBT, black



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	11/10	dr

MMP 221-R.

Modifications	Date	Name	knitter-switch	30 22 14	Page
					1/1