

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers MAX485

DESCRIPTION

The MAX485 is a half-duplex transceiver that meets the specifications of RS-485 and RS-422. Its BiCMOS design allows low power operation without sacrificing performance. The MAX485 meets the requirements of the RS-485 and RS-422 protocols up to 5Mbps underload. The ESD tolerance is more than $\pm 8\text{kV}$ for both Human Body Model and $\pm 15\text{kV}$ for IEC61000-4-2 Air Discharge Method on this device.



FEATURES

- Single +5V Supply
- Low Power BiCMOS
- Driver/Receiver Enable for Multi-Drop Configurations
- Half-Duplex Versions Available
- Data rate: 5 Mbps
- ESD Specifications
 - $\pm 15\text{kV}$ IEC61000-4-2 Air Discharge
 - $\pm 8\text{kV}$ Human Body Model

APPLICATIONS

- Low Power RS-485 Systems
- DTE-DCE Interface
- Packet Switching
- Local Area Networks
- Data Concentration
- Data Multiplexers
- Integrated Services Digital Network (ISDN)

PIN CONFIGURATION AND LOGIC DIAGRAM

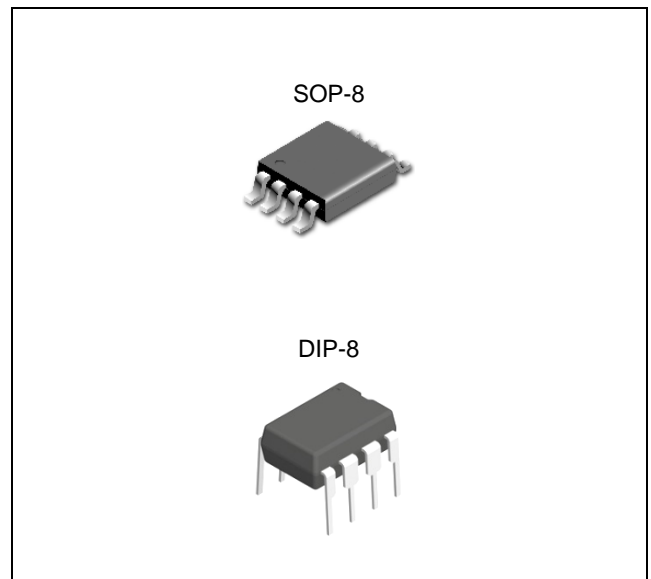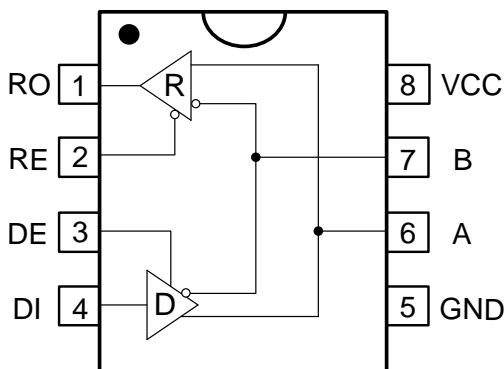


TRUTH TABLE

Transmission				
Inputs			Outputs	
RE	DE	DI	A	B
X	1	1	1	0
X	1	0	0	1
0	0	X	Z	Z
1	0	X	Z	Z
Receiver				
Inputs			Outputs	
RE	DE	A-B	RO	
0	0	$\geq +0.2\text{V}$	1	
0	0	$\leq -0.2\text{V}$	0	
0	0	Open	1	
1	0	X	Z	

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers **MAX485**

ORDERING INFORMATION

Package	Oder No.	Description	Marking	Compliance	Status
SOP-8	MAX485ED	RS-485/RS-422 Transceivers	MAX485E	RoHS, Green	Active
DIP-8	MAX485EN	RS-485/RS-422 Transceivers	MAX485E	RoHS, Green	Contact us

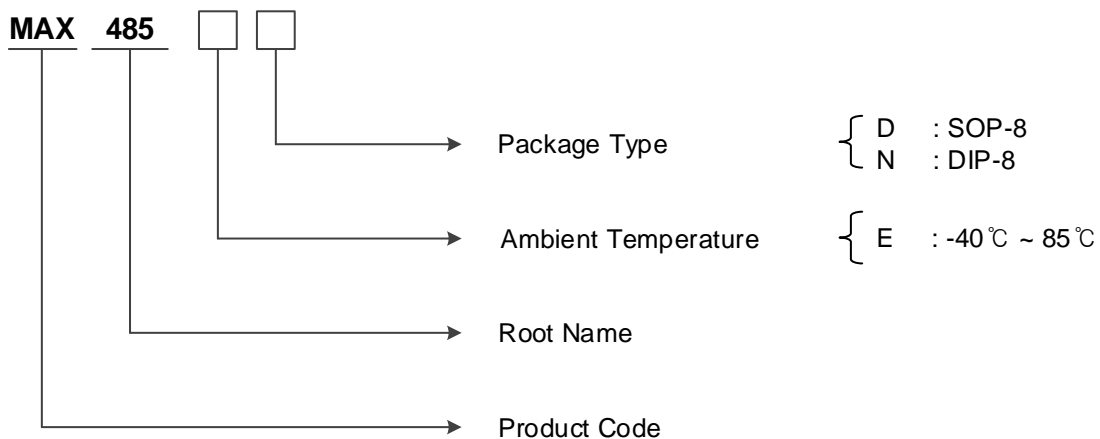

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers MAX485

ABSOLUTE MAXIMUM RATINGS


Characteristic	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}		7	V
Control Input Voltage	V_{DE}, V_{RE}	-0.3	$V_{CC} + 0.5$	V
Driver Input Voltage	V_{DI}	-0.3	$V_{CC} + 0.5$	V
Driver Output Voltage	A, B	-15	15	V
Receiver Input Voltage	A, B	-15	15	V
Receiver Output Voltage	V_{RO}	-0.3	$V_{CC} + 0.5$	V
Junction Temperature	T_J	-40	125	°C
Storage Temperature Range	T_{STG}	-65	150	°C

RECOMMENDED OPERATING CONDITIONS


Characteristic	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}	4.75	5.25	V
Operating Ambient Temperature Ranges	T_A	-40	85	°C

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers **MAX485**

PIN CONFIGURATION

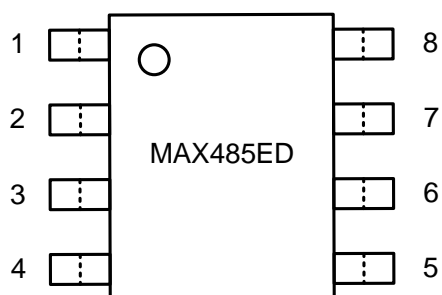

SOP-8



DIP-8

PIN DESCRIPTION

Pin No.	SOP-8 / DIP-8 PKG	
	Name	Function
1	RO	Receiver Output
2	RE*	Receiver Output Enable Active Low
3	DE	Driver Output Enable Active High
4	DI	Driver Input
5	GND	Ground
6	A	Non-inverting Driver Output and Receiver Input
7	B	Inverting Driver Output and Receiver Input
8	V _{CC}	Power Supply: 4.75V to 5.25V

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers MAX485

ELECTRICAL CHARACTERISTICS

Unless otherwise specified: $V_{CC} = 5V \pm 5\%$, $T_A = T_{MIN}$ to T_{MAX}

PARAMETER	Symbol	CONDITIONS	MIN	TYP	MAX	UNITS
DRIVER DC Characteristics						
Differential Driver Output (no load)	V_{OD1}	$R_L = \infty$, Figure 1	GND		V_{CC}	V
Differential Driver Output (with load)	V_{OD2}	$R_L = 50\Omega$ (RS-422), Figure 1	2		V_{CC}	V
		$R_L = 27\Omega$ (RS-485), Figure 1	1.5		V_{CC}	
Change in Magnitude of Driver Differential Output Voltage for Complementary Output States	ΔV_{OD}	$R_L = 27\Omega$ or 50Ω , Figure 1			0.2	V
Driver Common-Mode Output Voltage	V_{OC}	$R_L = 27\Omega$ or 50Ω , Figure 1			3	V
Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States	ΔV_{OC}	$R = 27\Omega$ or 50Ω , Figure 1			0.2	V
Input High Voltage	V_{IH}	DE, DI, RE*	2.0			V
Input Low Voltage	V_{IL}	DE, DI, RE*			0.8	V
Input Current	I_{IN1}	DE, DI, RE*			± 10	μA
Driver Short Circuit Current						
Driver Short-Circuit Current, $V_O = \text{High}$	I_{OSD1}	$-7V \leq V_O \leq 12V$			± 250	mA
Driver Short-Circuit Current, $V_O = \text{Low}$	I_{OSD2}	$-7V \leq V_O \leq 12V$			± 250	mA
DRIVER AC Characteristics						
Max. Transmission Rate	f_{MAX}		5			Mbps
Driver Input to Output	t_{DPLH}	Figure 3 & 5 $R_L = 54\Omega$, $C_{L1} = C_{L2} = 100pF$		30	60	ns
	t_{DPHL}			30	60	ns
Driver Output Skew to Output	t_{SKEW}			5	10	ns
Driver Rise or Fall Time	t_r, t_f			15	40	ns
Driver Enable to Output High	t_{ZH}		Figure 4 & 6 $C_L = 100pF$	S_2 closed	40	70
Driver Enable to Output Low	t_{ZL}	S_1 closed		40	70	ns
Driver Disable Time from Low	t_{HZ}	S_2 closed		40	70	ns
Driver Disable Time from High	t_{LZ}	S_1 closed		40	70	ns
RECEIVER DC Characteristics						
Receiver Differential Threshold Voltage	V_{TH}	$-7V \leq V_{CM} \leq 12V$	-0.2		0.2	V
Receiver Input Hysteresis	ΔV_{TH}	$V_{CM} = 0V$		20		mV
Receiver Output High Voltage	V_{OH}	$I_O = -4mA$, $V_{ID} = +200mV$	3.5			V
Receiver Output Low Voltage	V_{OL}	$I_O = +4mA$, $V_{ID} = -200mV$			0.4	V
Three-State (High Impedance) Output Current at Receiver	I_{OZR}	$0.4V \leq V_O \leq 2.4V$, $RE^* = 5V$			± 1	μA
Receiver Input Resistance	R_{IN}	$-7V \leq V_{CM} \leq 12V$	12	15		$k\Omega$
Input Current (A, B)	I_{IN2}	$DE = 0V$	$V_{IN} = 12V$		1.0	mA
		$V_{CC} = 0V$ or $5.25V$	$V_{IN} = -7V$		-0.8	
Receiver Short-Circuit Current	I_{OSR}	$0V \leq V_O \leq V_{CC}$	7		95	mA

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers **MAX485**

RECEIVER AC Characteristics							
Receiver Input to Output	t _{PLH}	Figure 2 & 7 S ₁ , S ₂ open C _L = 15pF		20	45	100	ns
	t _{PHL}			20	45	100	ns
t _{PLH} - t _{PHL} Differential Receiver Skew	t _{SKD}					13	
Receiver Enable to Output Low	t _{ZL}	Figure 2 & 8 C _L = 15pF	S ₁ closed		45	70	ns
Receiver Enable to Output High	t _{ZH}		S ₂ closed		45	70	ns
Receiver Disable Time from Low	t _{LZ}		S ₁ closed		45	70	ns
Receiver Disable Time from High	t _{HZ}		S ₂ closed		45	70	ns
Supply Current							
No-Load Supply Current	I _{CC}	RE = 0V or V _{CC}	DE=V _{CC}		900		uA
			DE=0V		600		

TEST CIRCUITS

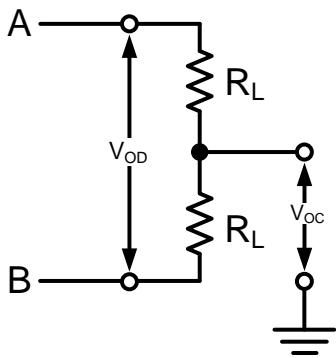


Figure 1.

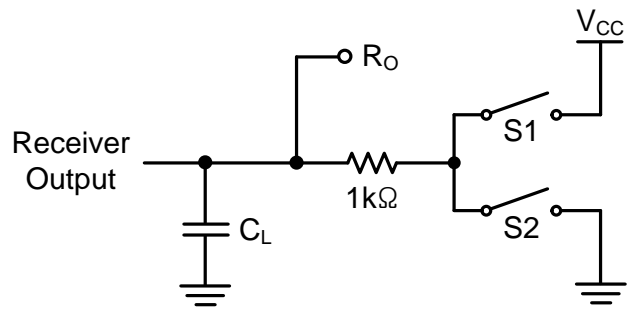


Figure 2.

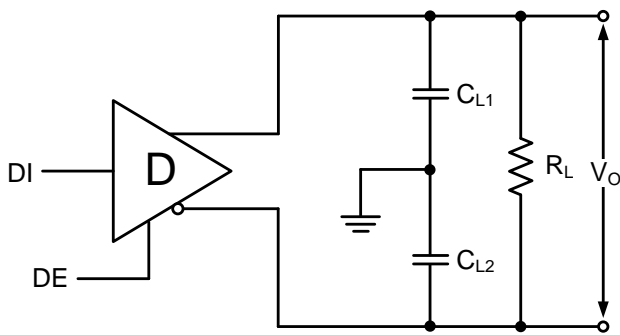


Figure 3.

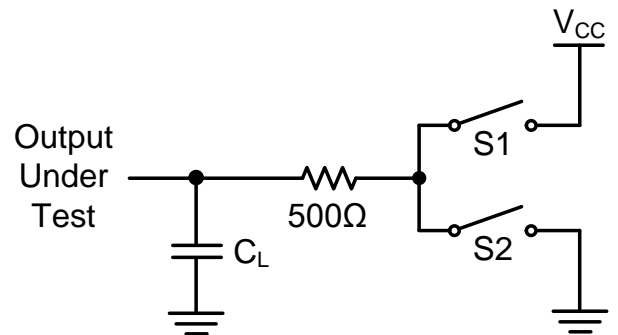


Figure 4.

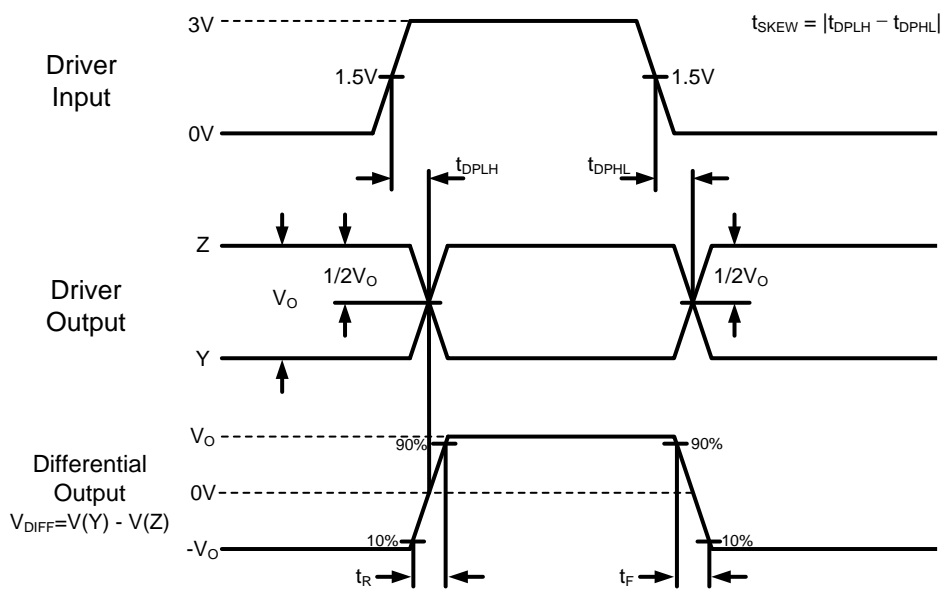


Figure 5.

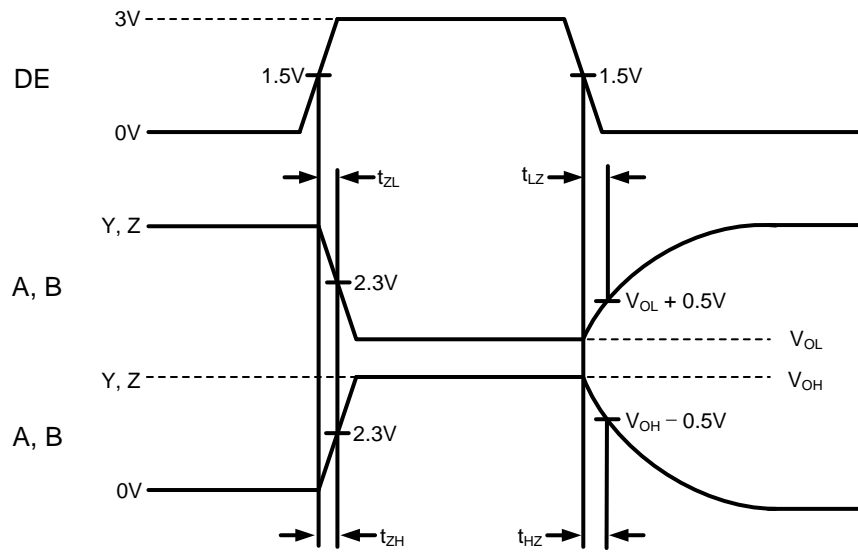


Figure 6.

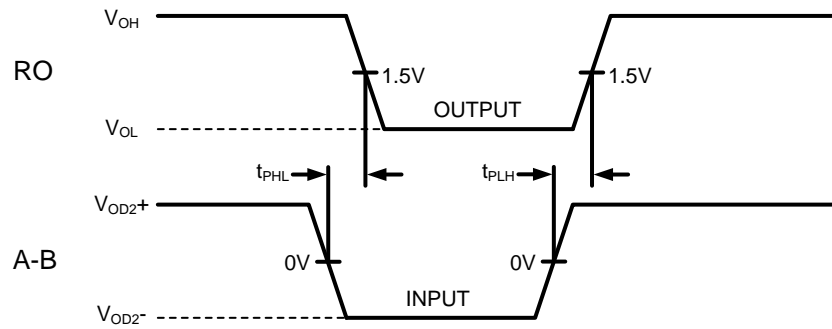


Figure 7.

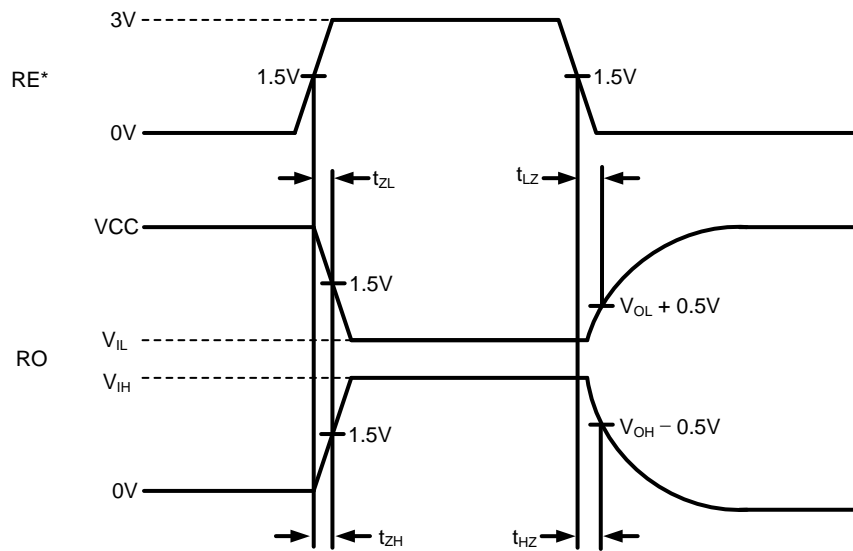


Figure 8.

APPLICATION INFORMATION

FUNCTIONAL DESCRIPTION

The MAX485 is half-duplex differential transceiver that meets the requirements of RS-485 and RS-422. The RS-485 standard is ideal for multi-drop applications and for long-distance interfaces. RS-485 allows up to 32 drivers and 32 receivers to be connected to a data bus, making it an ideal choice for multi-drop applications. Since the cabling can be as long as 4,000 feet, RS-485 transceivers are equipped with a wide (-7V to +12V) common mode range to accommodate ground potential differences. Because RS-485 is a differential interface, data is virtually immune to noise in the transmission line.

DRIVERS

The driver outputs of the MAX485 are differential outputs meeting the RS-485 and RS-422 standards. The typical voltage output swing with no load will be 0 Volts to +5 Volts. With worst case loading of 54 Ω across the differential outputs, the drivers can maintain greater than 1.5V voltage levels. The drivers of the MAX485 have an enable control line which is active HIGH. A logic HIGH on DE (pin 3) will enable the differential driver outputs. A logic LOW on the DE(pin 3) will tri-state the driver output. The transmitters of the MAX485 will operate up to at least 5Mbps.

RECEIVERS

The MAX485 receiver has differential inputs with an input sensitivity as low as $\pm 200\text{mV}$. Input impedance of the receivers is typically 15k Ω (12k Ω minimum). A wide common mode range of -7V to +12V allows for large ground potential differences between systems. The receivers of the MAX485 have a tri-state enable control pin. A logic LOW on RE* (pin 2) will enable the receiver, a logic HIGH on RE*(pin 2) will disable the receiver. The receiver for the MAX485 will operate up to at least 5Mbps. The receiver is equipped with the fail-safe feature. Fail-safe guarantees that the receiver output will be in a HIGH state when the input is left unconnected.

Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers MAX485


REVISION NOTICE

The description in this datasheet can be revised without any notice to describe its electrical characteristics properly.

Package Dimension

DIP8


DIP8 PACKAGE OUTLINE DIMENSIONS

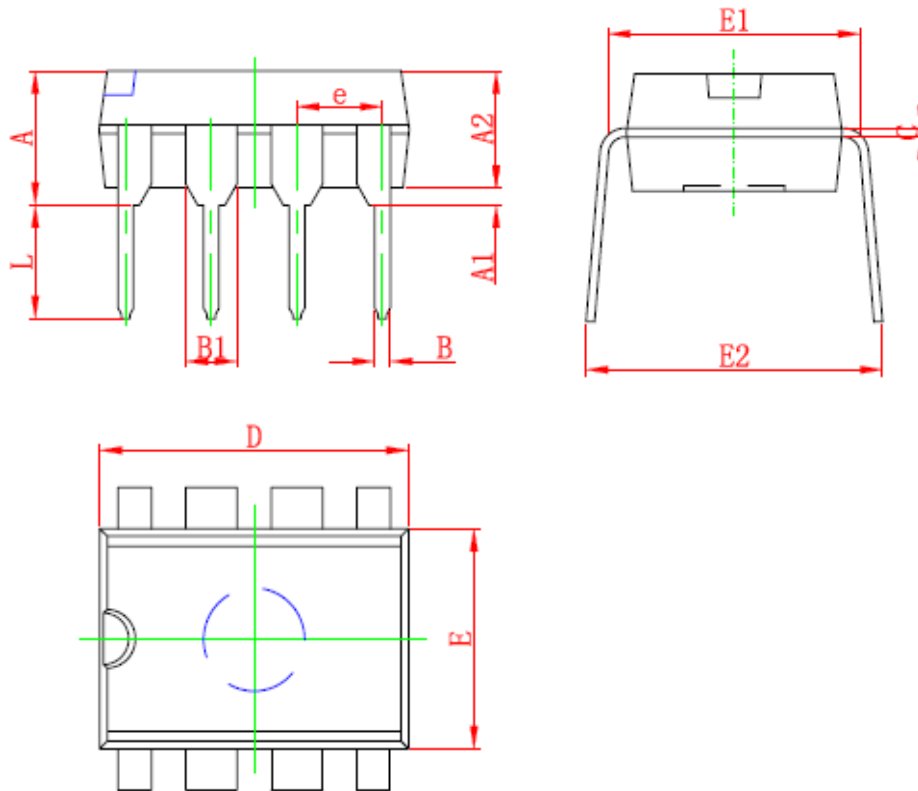

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510		0.020	
A2	3.200	3.600	0.126	0.142
B	0.360	0.560	0.014	0.022
B1	1.524 (TYP)		0.060 (TYP)	
C	0.204	0.360	0.008	0.014
D	9.000	9.400	0.354	0.370
E	6.200	6.600	0.244	0.260
E1	7.620 (TYP)		0.300 (TYP)	
e	2.540 (TYP)		0.100 (TYP)	
L	3.000	3.600	0.118	0.142
E2	8.200	9.400	0.323	0.370

Package Dimension

SOP-8 & SOP-8PP

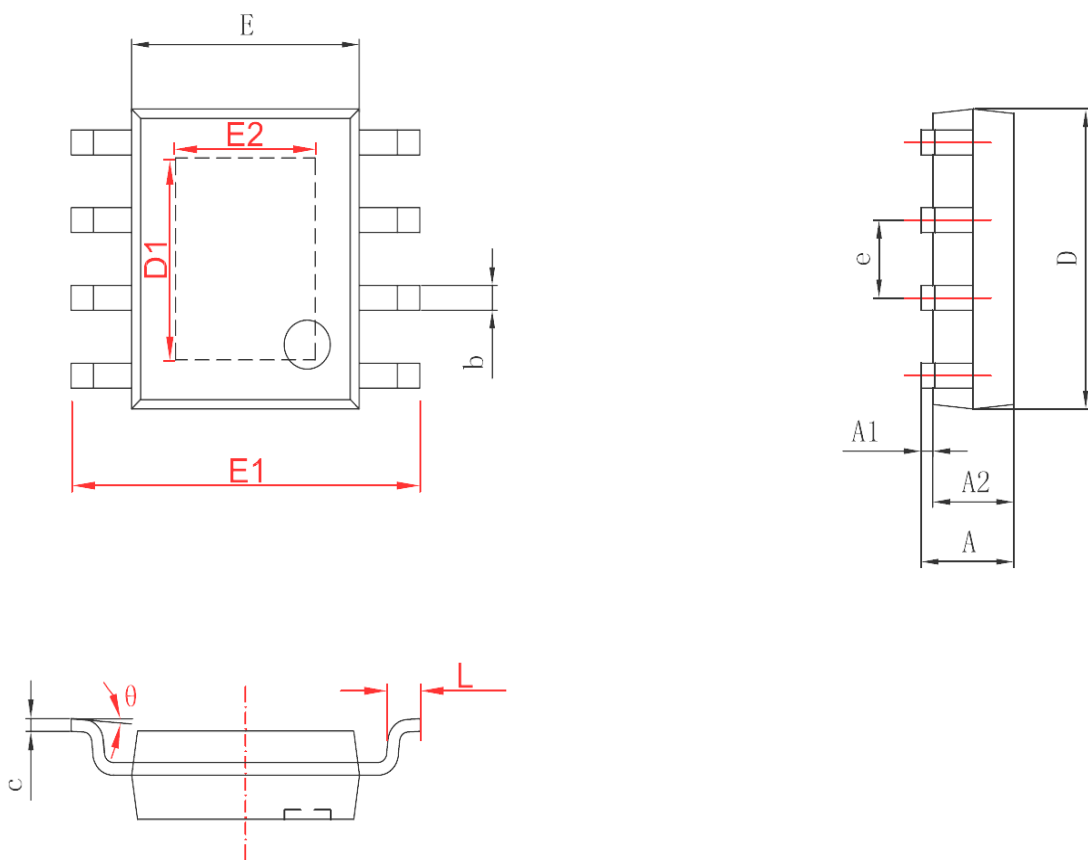

SYMBOL	Dimension In Millimeters		Dimension In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1 (for SOP-8)	0.100	0.250	0.004	0.010
A1 (for SOP-8PP)	0.050	0.150	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
D1 (for SOP-8PP)	3.202	3.402	0.126	0.134
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2 (for SOP-8PP)	2.313	2.513	0.091	0.099
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°		