

Panasonic

ideas for life



High capacity SSR
up to 40A
with wide variation

AQ-N RELAYS

FEATURES


1. Five types available from 10A to 40A
2. Built-in varistor
3. Includes operation LED (red)
4. Dielectric voltage of 4,000V
5. 4 to 32V DC input voltage
6. Both zero-cross and random types available

TYPICAL APPLICATIONS

1. Molding machine (heater control)
2. Temperature controlled bath (heater control)
3. Printing machines (heater control)
4. Wrapping and packing machine (heater control)
5. Machine tools (Motor control)

Compliance with RoHS Directive

ORDERING INFORMATION

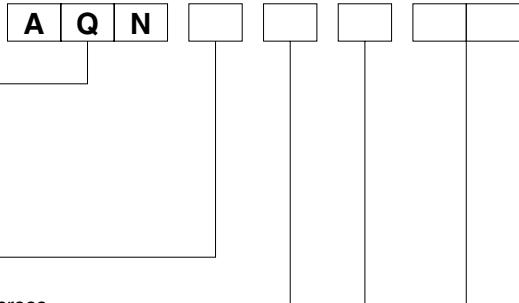

Load current

- 1: 10 A
- 2: 15 A
- 3: 20 A
- 4: 25 A
- 6: 40 A

Load voltage

- 1: 75 to 250 V AC, Zero-cross
- 2: 75 to 250 V AC, Random

Input voltage

- 1: 4 to 32 V DC

Function

- Nil: None
- V: Built-in varistor
- L: With LED indication
- VL: Built-in varistor and with LED indication

TYPES

1. Standard type

Type	Load current	Load voltage	Part No.
Zero-cross type	10A	75 to 250V AC	AQN111
	15A		AQN211
	20A		AQN311
	25A		AQN411
	40A		AQN611
Random type	10A	75 to 250V AC	AQN121
	15A		AQN221
	20A		AQN321
	25A		AQN421
	40A		AQN621



Discontinued
Last time buy: August 31, 2011

AQ-N

2. With LED indication type

Type	Load current	Load voltage	Part No.
Zero-cross type	10A	75 to 250V AC	AQN111L
	15A		AQN211L
	20A		AQN311L
	25A		AQN411L
	40A		AQN611L
	10A		AQN121L
Random type	15A	75 to 250V AC	AQN221L
	20A		AQN321L
	25A		AQN421L
	40A		AQN621L

3. With varistor type

Type	Load current	Load voltage	Part No.
Zero-cross type	10A	75 to 250V AC	AQN111V
	15A		AQN211V
	20A		AQN311V
	25A		AQN411V
	40A		AQN611V
	10A		AQN121V
Random type	15A	75 to 250V AC	AQN221V
	20A		AQN321V
	25A		AQN421V
	40A		AQN621V

4. With varistor and LED indication type

Type	Load current	Load voltage	Part No.
Zero-cross type	10A	75 to 250V AC	AQN111VL
	15A		AQN211VL
	20A		AQN311VL
	25A		AQN411VL
	40A		AQN611VL
	10A		AQN121VL
Random type	15A	75 to 250V AC	AQN221VL
	20A		AQN321VL
	25A		AQN421VL
	40A		AQN621VL

Standard packing; carton: 2 pcs., case: 100 pcs.

5. Accessories

Type	Part No.	Packaged quantity
Standard heat sink (10A, 15A and 20A)	AQP-HS-J10A	5 in a carton, 20 in a case
Standard heat sink (25A)	AQP-HS-30/40A	5 in a carton, 20 in a case
Standard heat sink (40A)	AQP-HS-J25A	No carton, 5 in a case
Slim heat sink (45mm wide) (Mountable on a DIN rail)	AQP-HS-SJ20A	No carton, 8 in a case
DIN rail mounting plate	AQP-DP	10 in a carton, 100 in a case
Terminal cover	AQP-NPC	2 in a carton, 100 in a case

RATINGS

1. Ratings (Measurement condition: at 20°C 68°F, Input ripple: 1% or less)

1) Zero-cross type

Item	Type	10A	15A	20A	25A	40A	Remarks	
	Part No.	AQN111	AQN211	AQN311	AQN411	AQN611		
Input side	Part No.	AQN111L AQN111V AQN111VL	AQN211L AQN211V AQN211VL	AQN311L AQN311V AQN311VL	AQN411L AQN411V AQN411VL	AQN611L AQN611V AQN611VL	*1	
	Input voltage	4 to 32V						
Output side	Input current	Max. 20mA					*1	
	Drop-out voltage	Min. 1V						
Output side	Max. load current	10A	15A	20A	25A	40A	*2	
	Load voltage	75V to 250V						
	Frequency	45Hz to 65Hz						
	Non-repetitive surge current	100A	150A	200A	250A	400A		
Max. "OFF-state" leakage current		Max. 10mA					at 60Hz	
Max. "ON-state" voltage drop		1.6V					at Max. carrying current	
Min. load current		100mA					*4	

Notes: *1. Please refer to REFERENCE DATA, "3. Input current vs. input voltage".

*2. Please refer to REFERENCE DATA, "1. Load current vs. ambient temperature".

*3. Please refer to REFERENCE DATA, "2. Non-repetitive surge current vs. carrying time".

*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

2) Random type

Item	Type	10A	15A	20A	25A	40A	Remarks
	Part No.	AQN121 AQN121L AQN121V AQN121VL	AQN221 AQN221L AQN221V AQN221VL	AQN321 AQN321L AQN321V AQN321VL	AQN421 AQN421L AQN421V AQN421VL	AQN621 AQN621L AQN621V AQN621VL	
Input side	Input voltage	4 to 32V				*1	
Input side	Input current	Max. 20mA				*1	
Input side	Drop-out voltage	Min. 1V					
Output side	Max. load current	10A	15A	20A	25A	40A	*2
Output side	Load voltage	75V to 250V					
Output side	Frequency	45Hz to 65Hz					
Output side	Non-repetitive surge current	100A	150A	200A	250A	400A	In one cycle at 60Hz *3
Output side	Max. "OFF-state" leakage current	Max. 10mA				at 60Hz	
Output side	Max. "ON-state" voltage drop	1.6V				at Max. carrying current	
Output side	Min. load current	100mA				*4	

Notes: *1. Please refer to REFERENCE DATA, "3. Input current vs. input voltage".

*2. Please refer to REFERENCE DATA, "1. Load current vs. ambient temperature".

*3. Please refer to REFERENCE DATA, "2. Non-repetitive surge current vs. carrying time".

*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

2. Characteristics (Measurement condition: at 20°C 68°F, Input ripple: 1% or less)

1) Zero-cross type

Type	10A	15A	20A	25A	40A	Remarks
Part No.	AQN111 AQN111L AQN111V AQN111VL	AQN211 AQN211L AQN211V AQN211VL	AQN311 AQN311L AQN311V AQN311VL	AQN411 AQN411L AQN411V AQN411VL	AQN611 AQN611L AQN611V AQN611VL	
Operate time, max.	1/2 cycle of voltage sine wave + 1ms					
Release time, max.	1/2 cycle of voltage sine wave + 1ms					
Insulation resistance, min.	100MΩ between input and output				at 500 V DC	
Breakdown voltage	4,000 Vrms between input and output; 2,500 Vrms between input, output and case				for 1min.	
Vibration resistance (Functional)	10 to 55Hz double amplitude of 1.5mm				X, Y, Z axes	
Shock resistance (Functional)	Min. 980 m/s²				X, Y, Z axes	
Ambient temperature	-20°C to +80°C -4°F to +176°F*2				Non-condensing at low temperatures	
Storage temperature	-25°C to +85°C -13°F to +185°F					
Operational method	Zero-cross (Turn-ON and Turn-OFF)					

2) Random type

Type	10A	15A	20A	25A	40A	Remarks
Part No.	AQN121 AQN121L AQN121V AQN121VL	AQN221 AQN221L AQN221V AQN221VL	AQN321 AQN321L AQN321V AQN321VL	AQN421 AQN421L AQN421V AQN421VL	AQN621 AQN621L AQN621V AQN621VL	
Operate time, max.	1ms					
Release time, max.	1/2 cycle of voltage sine wave + 1ms					
Insulation resistance, min.	100MΩ between input and output				at 500 V DC	
Breakdown voltage	4,000 Vrms between input and output; 2,500 Vrms between input, output and case				for 1min.	
Vibration resistance (Functional)	10 to 55Hz double amplitude of 1.5mm				X, Y, Z axes	
Shock resistance (Functional)	Min. 980 m/s²				X, Y, Z axes	
Ambient temperature	-20°C to +80°C -4°F to +176°F				Non-condensing at low temperatures	
Storage temperature	-25°C to +85°C -13°F to +185°F					
Operational method	Random Turn-ON, Zero-cross Turn-OFF					



Discontinued
Last time buy: August 31, 2011

AQ-N

REFERENCE DATA

1. Load current vs. ambient temperature

Use load current within range specified in the figure below.

Tested condition

With external heat sink

(1) 10A, 15A, 20A type

Shown with standard heat sink
(AQP801)

(2) Shown with 25A type standard heat sink (AQP804)

(3) Shown with 40A type standard heat sink (AQP806)


(4) In the case of the AQP812 slim heat-sink types, characteristics data are available for each type. Please refer to (6).

2) If attached to a heat sink, use a heat conductive compound (Ex. Toshiba silicone YG6111 or TSK5303) of similar coating to improve cooling.


Without external heat sink

If the mounting surface is not metallic and a heat sink is not used, expose the bottom surface and plate surface to improve heat dissipation.


(1) 10A type

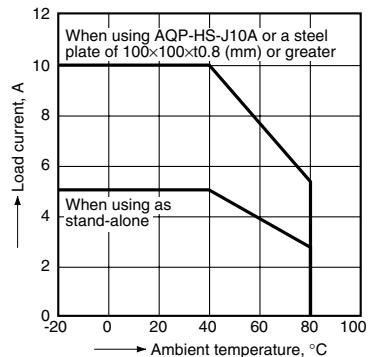


(2) 15A type

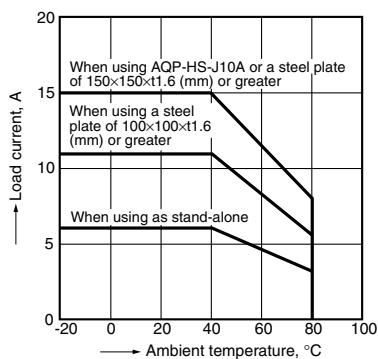


(3) 20A type

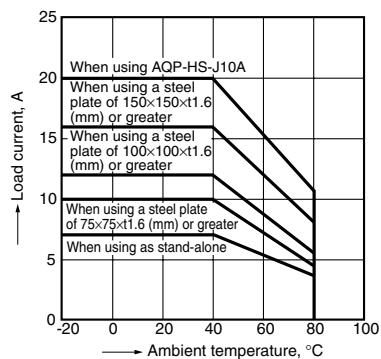


(4) 25A type

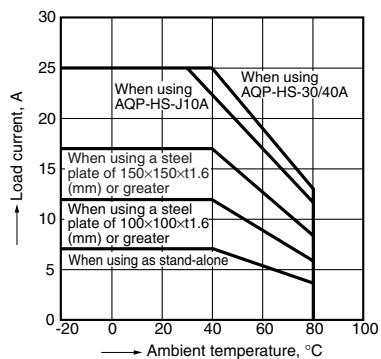


(5) 40A type

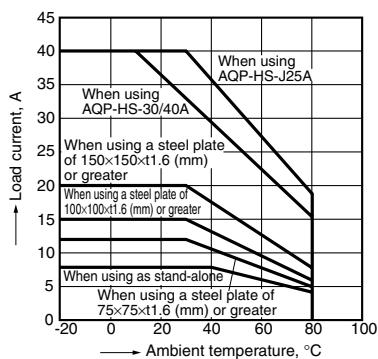

(6) Data when mounted on an AQP-HS-SJ20A slim heat sink

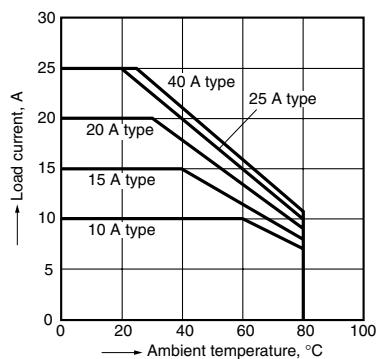


2. Non-repetitive surge current vs. carrying time

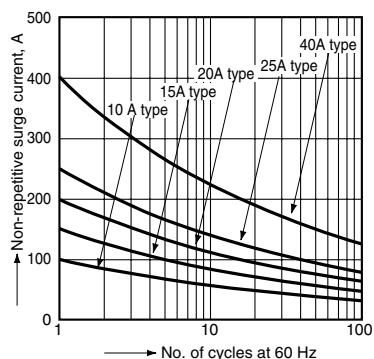

3. Input current vs. input voltage

10A, 15A, 20A, 25A, 40A common

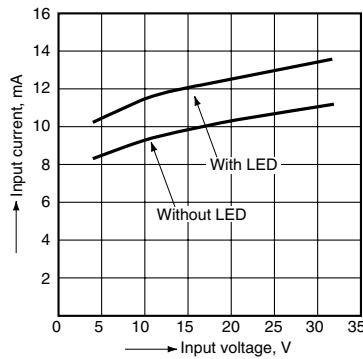


AQ-N

Discontinued
Last time buy: August 31, 2011

DIMENSIONS (mm inch)

* The right figure is the LED indication type.
The standard type has the same dimensions.



CAD Data

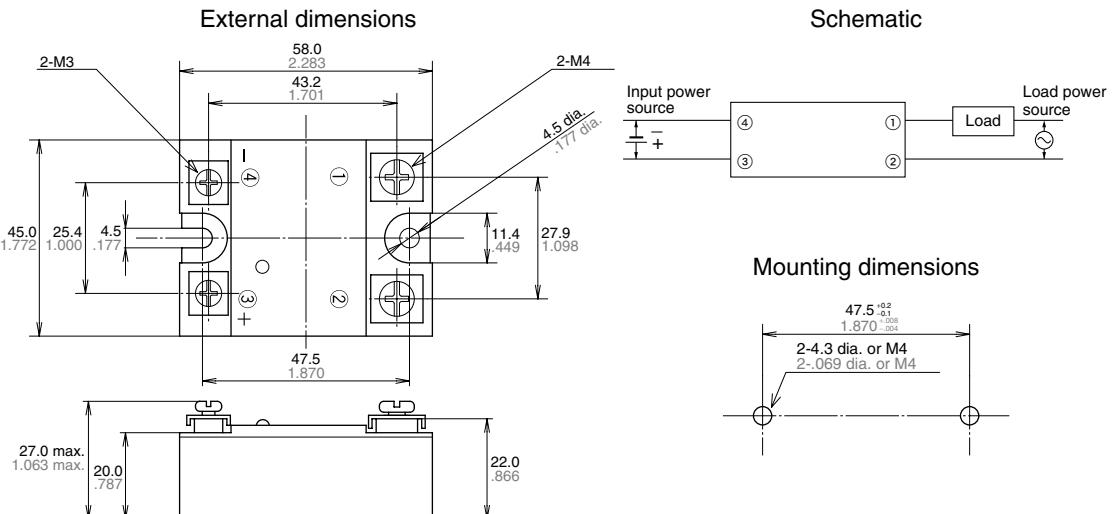


ACCESSORIES

AQP-HS-SJ20A Slim Heat Sink

CAD Data

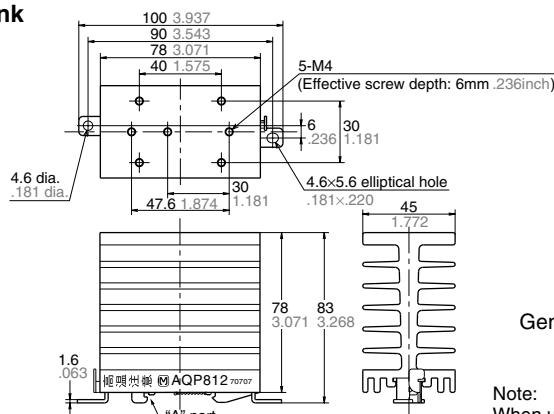

Mounting dimensions




General tolerance: $\pm 1.0 \pm .039$


Note:
When using on a DIN rail, please install so that the "A" part is on top.

AQP-HS-J10A Standard Heat Sink

CAD Data

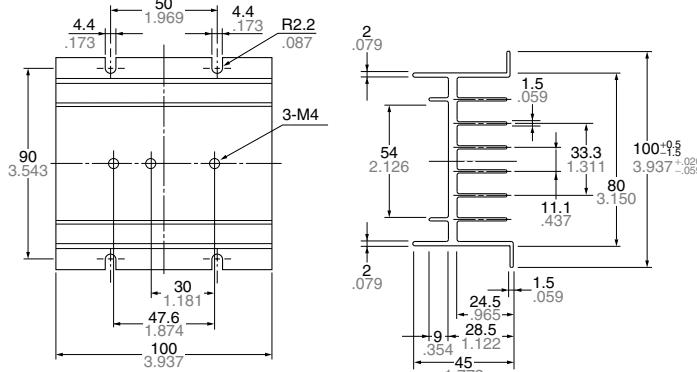


Mounting dimensions




AQP-HS-30/40A Standard Heat Sink

CAD Data

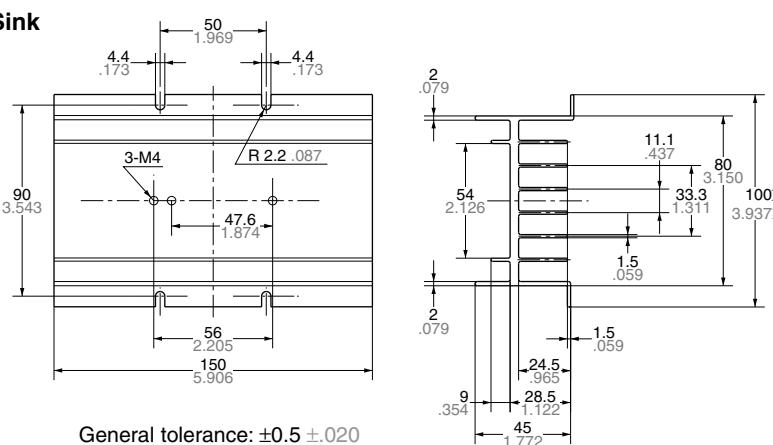

Mounting dimensions



General tolerance: $\pm 0.5 \pm .020$





Discontinued
Last time buy: August 31, 2011


AQ-N

AQP-HS-J25A Standard Heat Sink

CAD Data

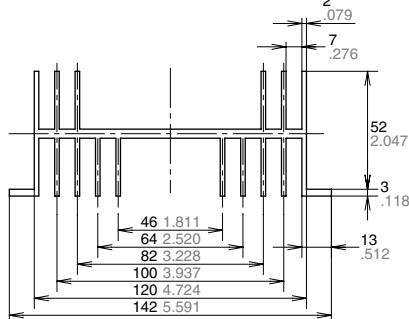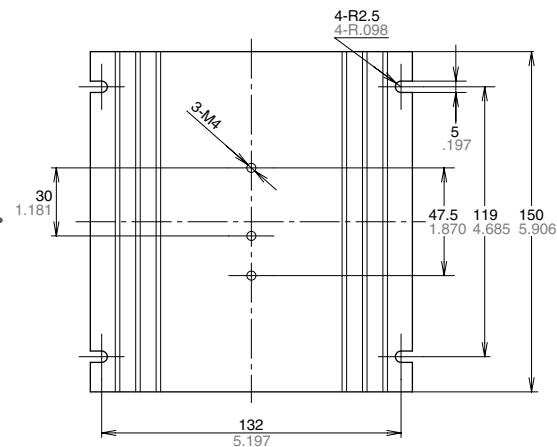


Mounting dimensions

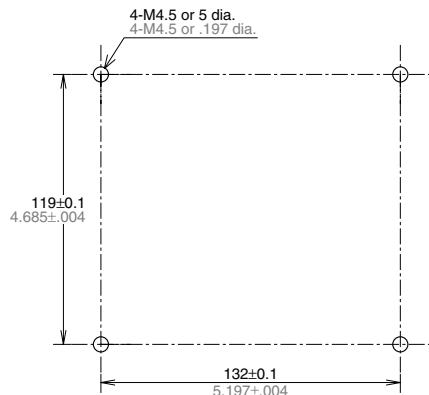

AQP-DP DIN Rail Mounting Plate


CAD Data

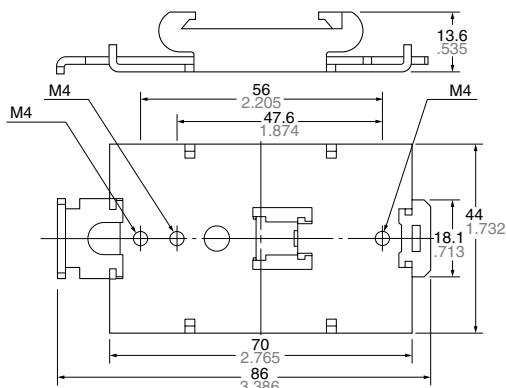

General tolerance: ± 0.5 $\pm .020$


AT8-DLA1 Mounting Rail

CAD Data

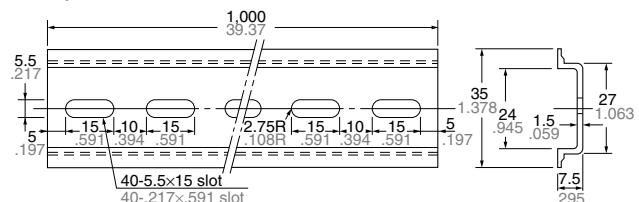



ATA4806 Fastening Plate

CAD Data



AQP-NPC Terminal Cover

CAD Data

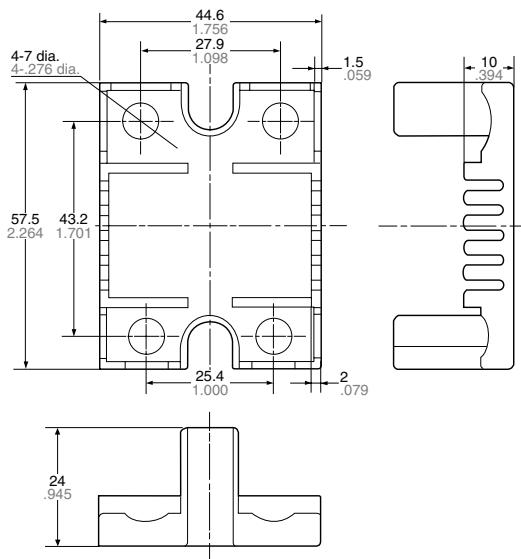

Recommended Temperature Controllers



<KT4H Temperature Controller>

Our temperature controller is recommended for use with our Solid State Relays.

Features

- Data can be collected using the RS485 communications interface via a PLC.
- Improved visibility using a negative type LCD and backlight.
- Depth-wise length (chassis dimension) is 56 mm 2.205 inch.

Substitute part numbers

Power supply	Control output	Part No.
100 to 240 V AC	Relay contact	AKT4H111100

*For detailed product information about temperature controllers, please refer to our website:
http://panasonic-denko.co.jp/ac/e/fasys/component/temperature_controller/

For Cautions for Use