



Digital ABS Caliper CoolantProof IP67

Item number: 500-707-20

Dust- and Water-Protected

ABSOLUTE®

TÜVRheinland
CERTIFIED

www.tuv.com
ID 0000045042

PROPRIETARY INSPECTION CERTIFICATE

IP67

Images

	L: 290 mm
	A: 20 mm
	B: 24.5 mm
	C: 18.1 mm
	ØD: 50 mm
	H: 16 mm

	L: 290 mm
	A: 20 mm
	B: 24.5 mm
	C: 18.1 mm
	ØD: 50 mm
	H: 16 mm

Description

This IP67 ABSOLUTE digimatic caliper allows reliable measurements in a wide range of situations and offers you the following benefits:


- Excellent resistance against water and dust (IP67 protection level) enabling use in machining situations that include splashing coolant fluid
- It is dustproof, complies with EN60529 and withstands temporary complete immersion in water without suffering any damage.
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.

Features

Range:	0 - 200 mm
---------------	------------

Depth bar:	flat
Data output:	No
Max. Permissible Error E MPE:	±0,02 mm
Max. Permissible Error S MPE:	±0,04 mm
Digital step:	0,01 mm
Max. response speed:	Unlimited
Display:	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Delivered:	In a case, including 1 SR-44 battery
ORIGIN (ABS-Zero):	Yes
Auto Power OFF after 20 min. non use:	Yes
Low voltage alarm:	Yes
Battery life:	Approx. 5 years under normal use
Mass:	198 g


Dimensions

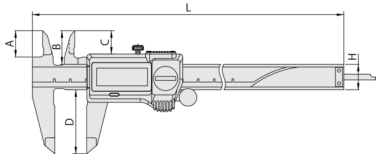

L:	290 mm
A:	20 mm
B:	24.5 mm
C:	18.1 mm
ØD:	50 mm
H:	16 mm


Accessories

Standard accessories:

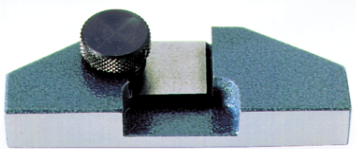

Depth Base Attachment for Caliper, 75mm width

75mm width for 100, 150, 200mm Range
Art No. 050083-10
Suggested retail price: 58.00 €*



Depth Base Attachment for Caliper

100mm width for 100, 150, 200mm Range
Art No. 050084-10
Suggested retail price: 65.00 €*

Spare parts

Consumable spares:



Battery SR44 1.5V

Art No. 938882
Suggested retail price: 10.00 €*
