
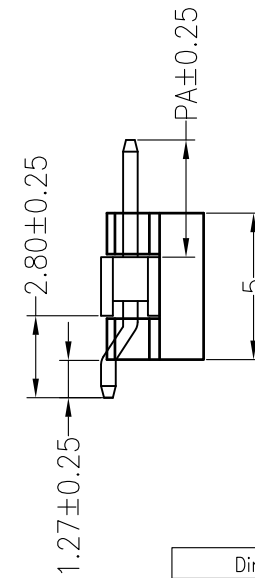
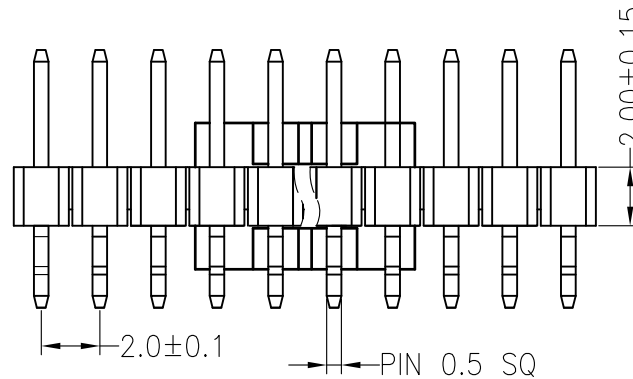
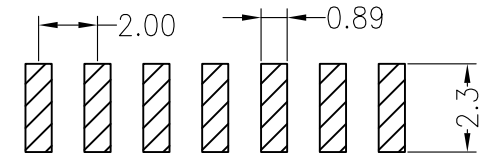


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

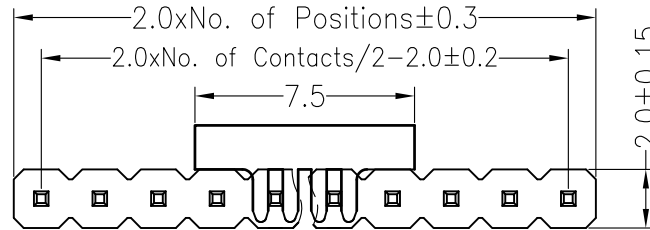

Dimension antitheses list		
ITEM	PA	L
Standard	4.00	9.00
Alternate		

OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	◆ ↗
DIM	TOL					

KLS ELECTRONIC CO., LTD

PART NO. L-KLS1-207BA-2.0-1-XX-TC-W-R
 TITLE: 2.0PH 1xNpin H2.0mm Single 90°SMT夹持盖

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE				
A0	2012.04.11	NEW DRAWING								