MARK	ECN	DESCRIPTION	DWN.	DATE

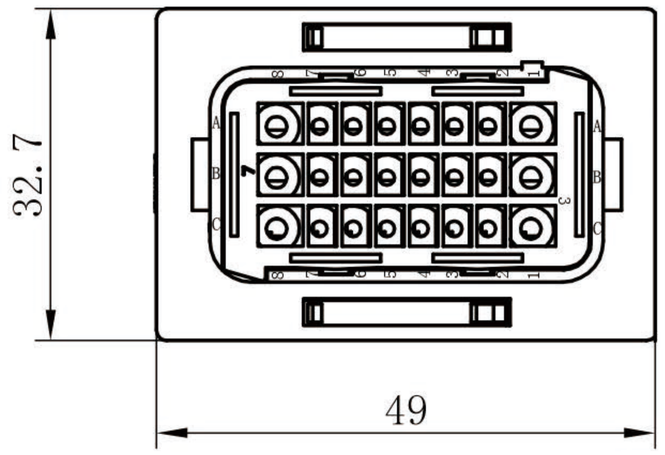

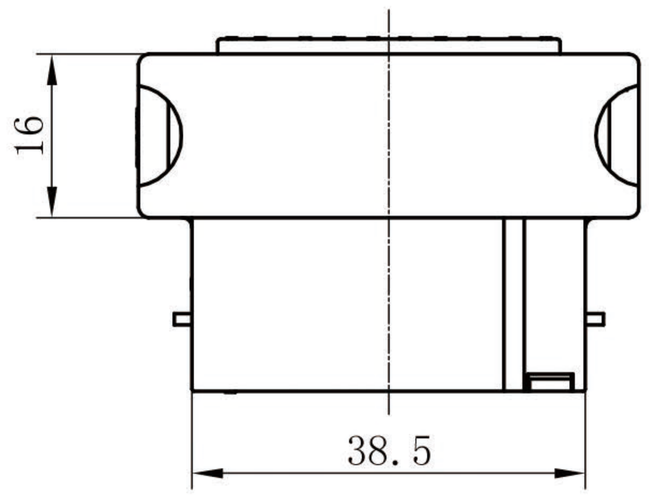

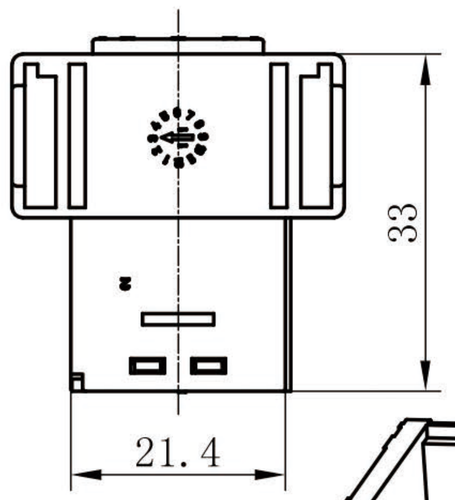

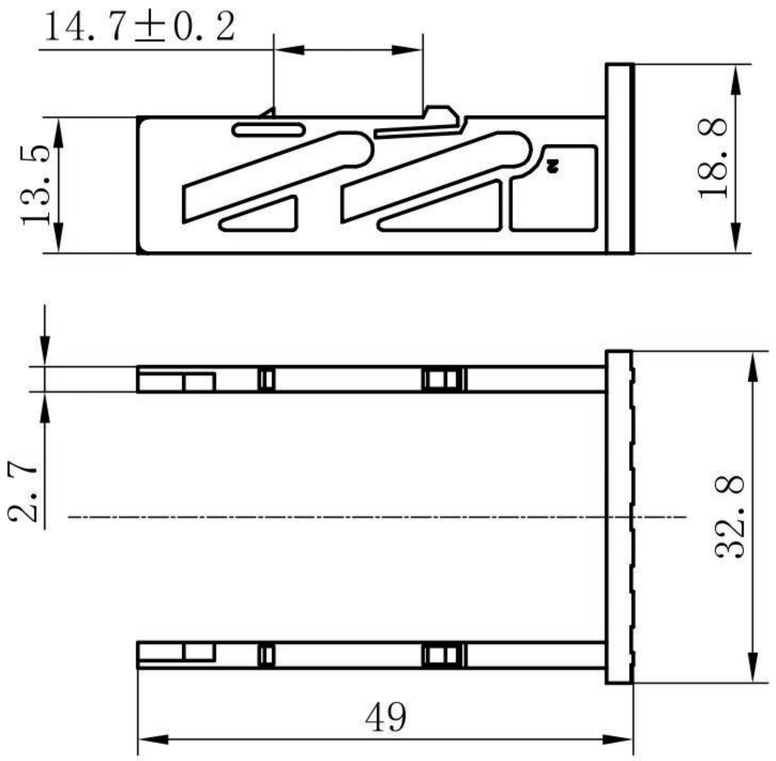

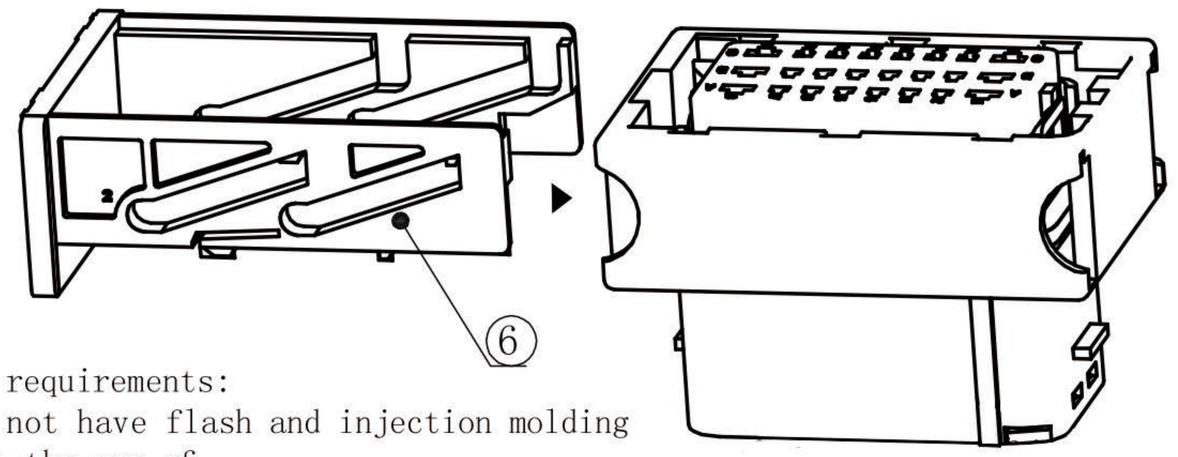

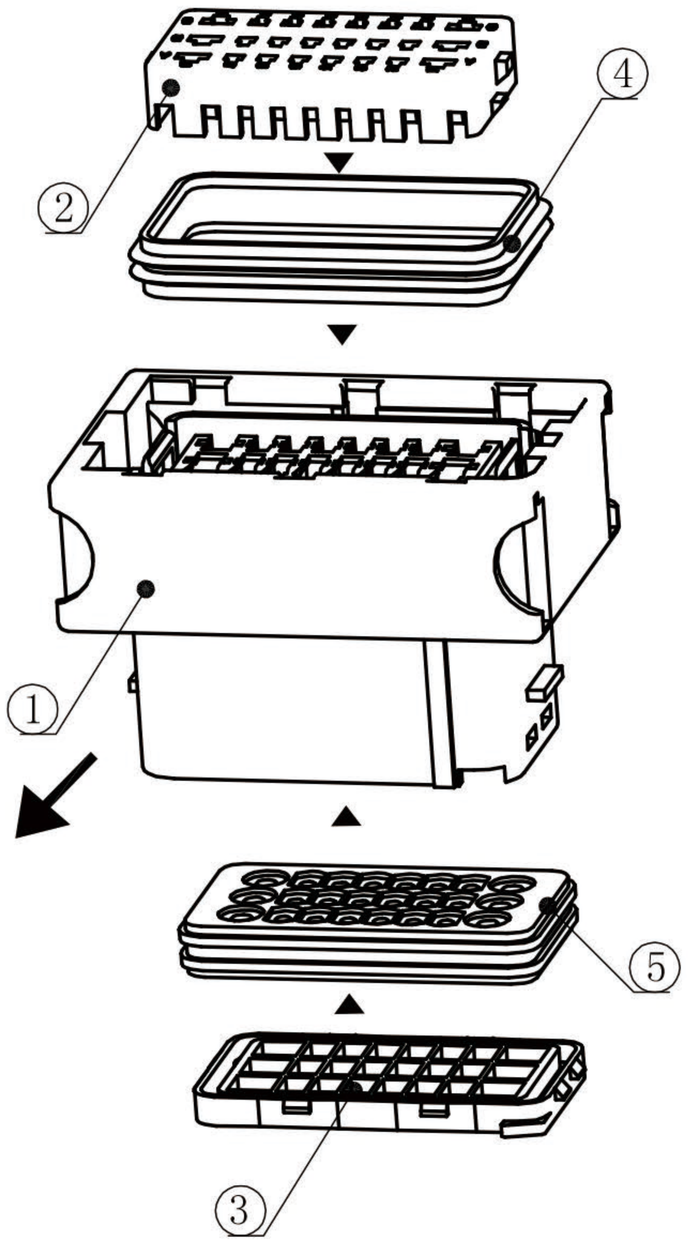

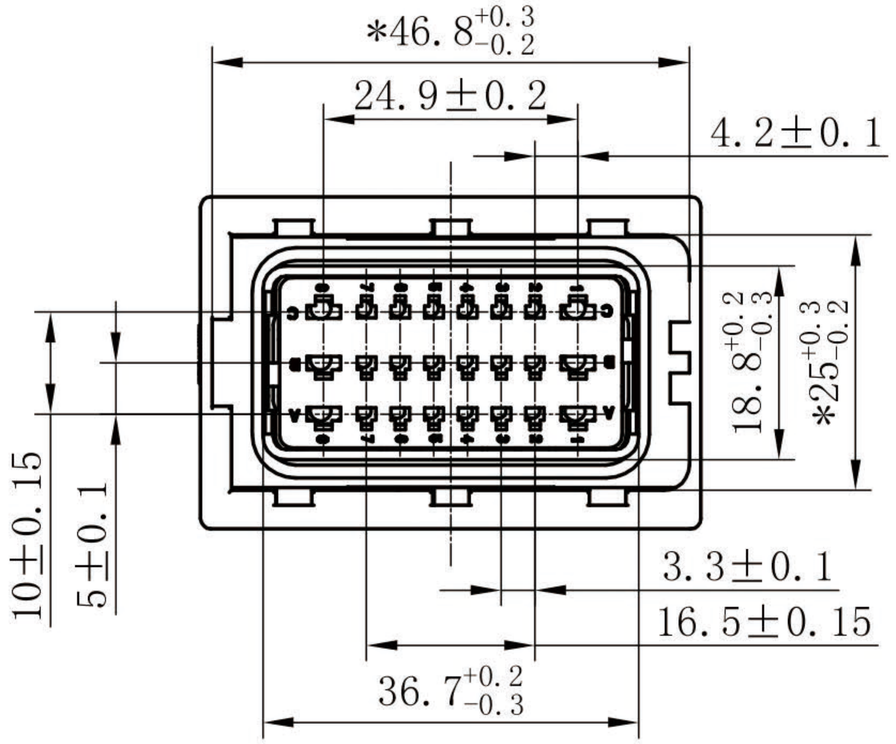

The technical requirements:
1. parts shall not have flash and injection molding defects affect the use of,
2. the product surface is clean, smooth, no deposition mark,
3. "*" is the important characteristic, "! "As the key characteristics.
4. dimensions without tolerance indication according to the GB-T14486-2008-MT6 level.
5. Pull rod assembly direction according to customer requirements.

NAME	MATERIAL	Q'TY	COLOUR
HOLDER	PA66+GF30%	1	PURPLE BOLDER
WIRE SEAL	SILICONE RUBBER	1	RED
WIRE SEAL	SILICONE RUBBER	1	RED
LOCK	PBT+GF15%	1	BLACK
LOCK	PBT+GF15%	1	YELLOW
HOUSING	PBT+GF15%	1	BLACK

NO. TOLERANCES GB/T14486-2008-MT6			
DIM. RANGE	DIM. TOLERANCES	DIM. RANGE	DIM. TOLERANCES
0～3	±0.23	>18～24	±0.41
>3～6	±0.26	>24～30	±0.45
>6～10	±0.29	>30～40	±0.50
>10～14	±0.33	>40～50	±0.57
>14～18	±0.37	>50～65	±0.65

DRAWN BY	CONFIRMED BY	APPROVED BY
HE 2013.5.4 LONG		LUO 2013.5.4 SHUFANG

REV.	1st-PERSON VIEW	FREE	UNIT	PAGE
A0		1:1	mm	1/1