


Thyristor

V_{RRM} = 1600 V
 I_{TAV} = 50 A
 V_T = 1,31 V


Single Thyristor

Part number

CMA50E1600QB

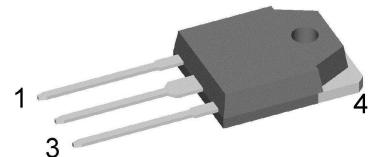

Backside: anode



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-3P

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- High creepage distance between terminals

Terms & Conditions of usage:

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact the sales office, which is responsible for you.


Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you. Should you intend to use the product in aviation, in health or live endangering or life support applications, please notify. For any such application we urgently recommend

- to perform joint risk and quality assessments;
- the conclusion of quality agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

Thyristor			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1700	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1600	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1600 \text{ V}$ $V_{R/D} = 1600 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		50 5	μA mA
V_T	forward voltage drop	$I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$ $I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1,30 1,66 1,31 1,77	V V V V
I_{TAV}	average forward current	$T_C = 110^\circ\text{C}$	$T_{VJ} = 150^\circ\text{C}$		50	A
$I_{T(RMS)}$	RMS forward current	180° sine			79	A
V_{T0} r_T	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ\text{C}$		0,83 9,6	V $\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				0,4	K/W
R_{thCH}	thermal resistance case to heatsink			0,25		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		310	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		550 595 470 505	A A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		1,52 1,48 1,11 1,06	kA^2s kA^2s kA^2s kA^2s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$	26		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu\text{s}$ $t_p = 300 \mu\text{s}$	$T_C = 150^\circ\text{C}$		10 5 0,5	W W W
P_{GAV}	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ\text{C}; f = 50 \text{ Hz}$ repetitive, $I_T = 150 \text{ A}$ $t_p = 200 \mu\text{s}; di_G/dt = 0,3 \text{ A}/\mu\text{s};$ $I_G = 0,3 \text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 50 \text{ A}$			150	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 150^\circ\text{C}$		1000	$\text{V}/\mu\text{s}$
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		1,5 1,6	V V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		50 80	mA mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^\circ\text{C}$		0,2	V
I_{GD}	gate non-trigger current				5	mA
I_L	latching current	$t_p = 10 \mu\text{s}$ $I_G = 0,3 \text{ A}; di_G/dt = 0,3 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		125	mA
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$		100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0,3 \text{ A}; di_G/dt = 0,3 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		2	μs
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 50 \text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ\text{C}$ $di/dt = 10 \text{ A}/\mu\text{s}$ $dv/dt = 20 \text{ V}/\mu\text{s}$ $t_p = 200 \mu\text{s}$		150		μs

Package TO-3P			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		150	°C
Weight				5		g
M_d	mounting torque		0,8		1,2	Nm
F_c	mounting force with clip		20		120	N

Product Marking

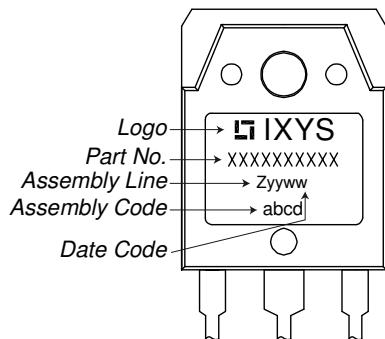


Part description

C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 50 = Current Rating [A]
 E = Single Thyristor
 1600 = Reverse Voltage [V]
 QB = TO-3P (3)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CMA50E1600QB	CMA50E1600QB	Tube	30	514998

Equivalent Circuits for Simulation


* on die level

 $T_{VJ} = 150$ °C


Thyristor

$V_{0\max}$ threshold voltage 0,83 V
 $R_{0\max}$ slope resistance * 7 mΩ

Outlines TO-3P

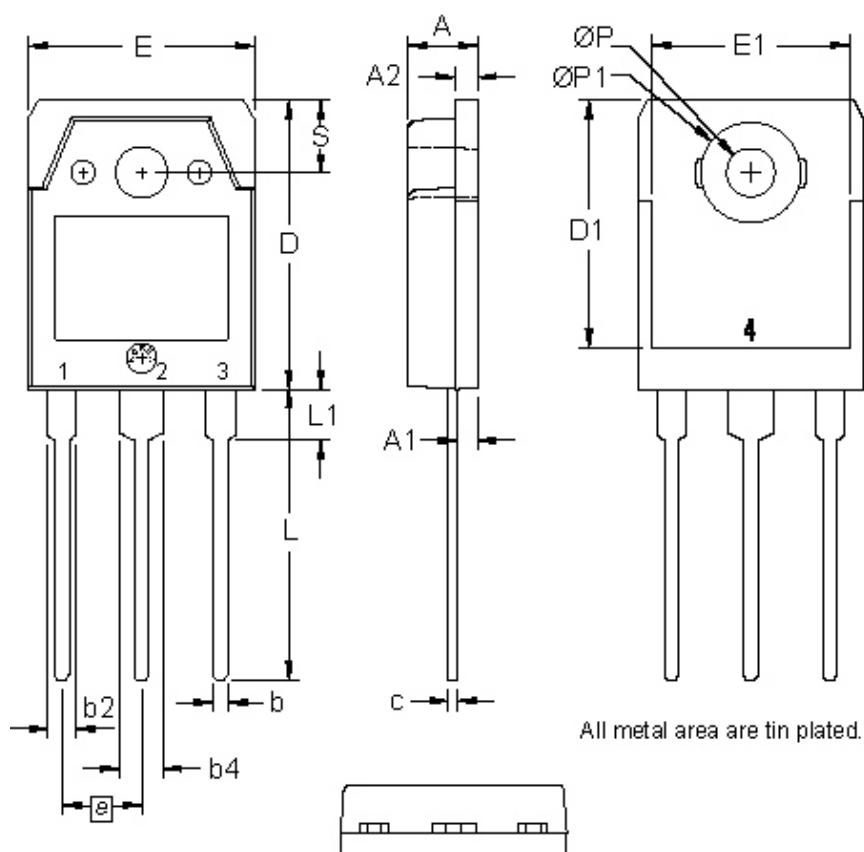

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.70	4.90	0.185	0.193
A1	1.30	1.50	0.051	0.059
A2	1.45	1.65	0.057	0.065
b	0.90	1.15	0.035	0.045
b2	1.90	2.20	0.075	0.087
b4	2.90	3.20	0.114	0.126
c	0.55	0.80	0.022	0.031
D	19.80	20.10	0.780	0.791
D1	16.90	17.20	0.665	0.677
E	15.50	15.80	0.610	0.622
E1	13.50	13.70	0.531	0.539
e	5.45 BSC		0.215 BSC	
L	19.80	20.20	0.780	0.795
L1	3.40	3.60	0.134	0.142
Ø P	3.20	3.40	0.126	0.134
Ø P1	6.90	7.10	0.272	0.280
S	4.90	5.10	0.193	0.201

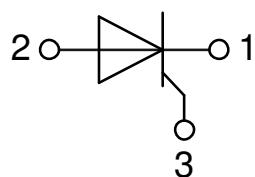

Thyristor

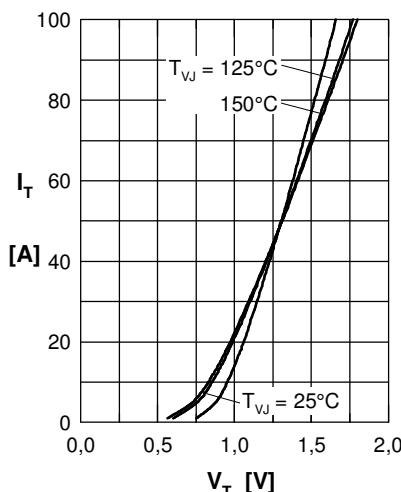


Fig. 1 Forward characteristics

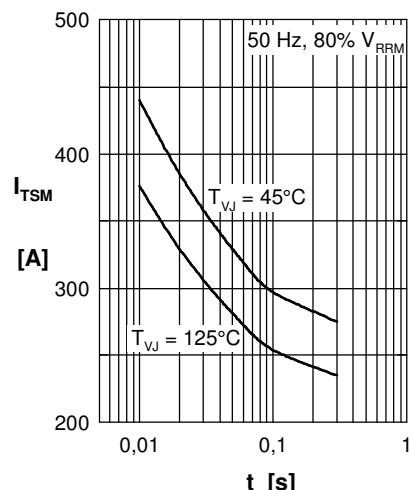
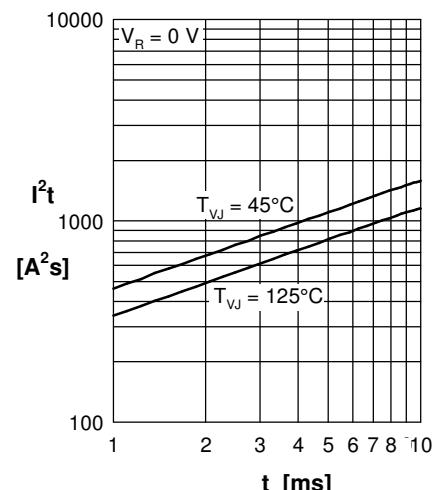
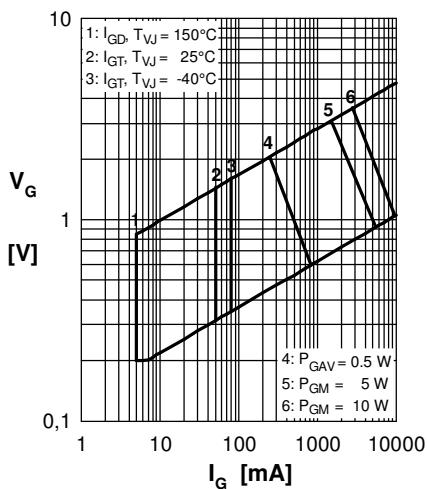
Fig. 2 Surge overload current
 $I_{TS M}$: crest value, t : durationFig. 3 I^2t versus time (1-10 s)

Fig. 4 Gate voltage & gate current

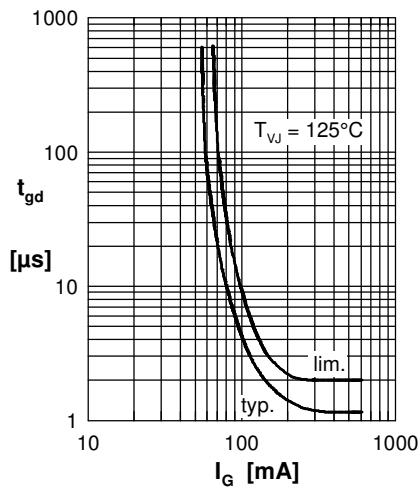
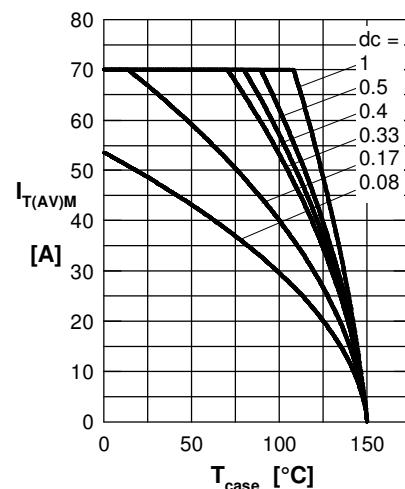
Fig. 5 Gate controlled delay time t_{gd} 

Fig. 6 Max. forward current at case temperature

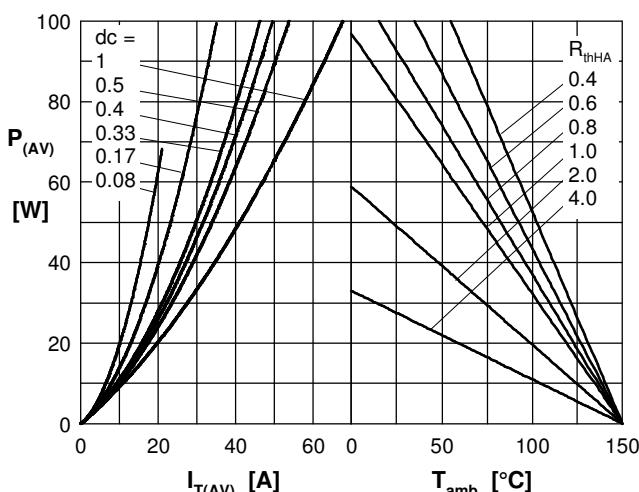
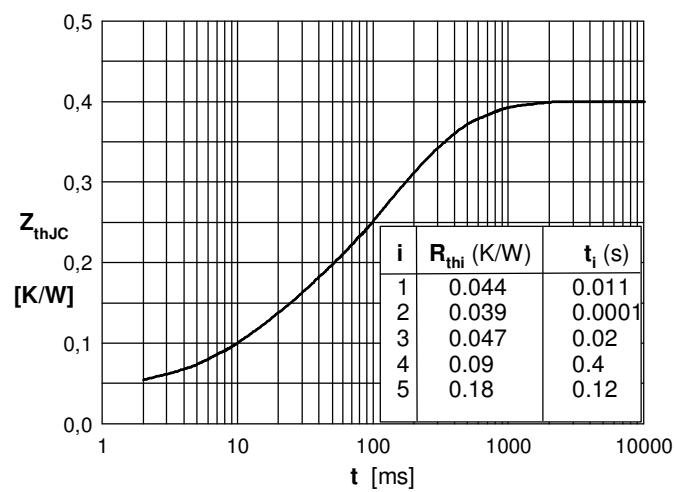
Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

Fig. 7 Transient thermal impedance junction to case