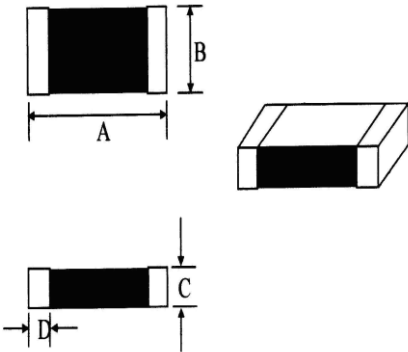


SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:	
PART NO: CB1005-152Y-N				DWG.NO: TE2018205	
CUSTOMER PART NO:				CUST.DWG.NO:	
(1) DIMENSIONS (UNIT: mm) 				A	1.00 ± 0.10 m/m
				B	0.50 ± 0.10 m/m
				C	0.50 ± 0.10 m/m
				D	0.25 ± 0.15 m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
(2)ELECTRICAL REQUIREMENTS					
Z (Ω)	1500 ± 25%	TEST FREQ	100MHz/100mV		
RDC (Ω)	1.5 (MAX)	TEST FREQ			
IDC (mA)	50 (MAX)	TEST FREQ			
				APPROVED BY 吳載敏	
				CHECKED BY 張明德	
				DRAWN BY Vicky	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: CB1005-152Y-N				DWG.NO: TE2018205					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)	DIMENSION (UNIT : mm)					
FREQ	100MHz /100mV			A	B	C	D		
SPEC	1500 ± 25%	1.5 (MAX)	50 (MAX)	1.00 ± 0.10	0.50 ± 0.10	0.50 ± 0.10	0.25 ± 0.15		
1	1567	0.976	OK	1.02	0.52	0.52	0.27		
2	1739	0.946	OK	1.00	0.51	0.50	0.25		
3	1517	0.965	OK	1.01	0.50	0.50	0.25		
4	1783	0.945	OK	1.02	0.50	0.51	0.26		
5	1674	0.929	OK	1.02	0.50	0.51	0.26		
6	1685	0.973	OK	1.00	0.51	0.51	0.27		
7	1654	0.964	OK	1.00	0.52	0.50	0.27		
8	1583	0.977	OK	1.01	0.51	0.51	0.26		
9	1738	0.903	OK	1.03	0.51	0.52	0.25		
10	1717	0.946	OK	1.01	0.50	0.50	0.27		
X	1666	0.952		1.01	0.51	0.51	0.26		
R	266	0.074		0.03	0.02	0.02	0.02		
TEST INSTRUMENTS HP 4338A MILLIOHMMETER HP 4291B RF IMPEDANCE / MATERIAL ANALYZER						APPROVED BY			
						吳載敏			
						CHECKED BY			
						張明德			
						DRAWN BY			
						Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

CB1005-152Y-N

