



PRODUCT DATA APPROVAL SHEET

Core- RM8S


Cosmo Ferrites Ltd. - INDIA

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 38.0mm
- Effective Area (A_e): 64.0mm²
- Effective Area (A_{Min}): 61.0mm²
- Effective Volume (V_e): 2430mm³

Approximate Weight (without Gap): 12g/Set




RM8S

Test Conditions: 1KHz/100mV/CFR COIL,N=10/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF139	2100 \pm 20%	2600 +30%/-20%	\leq 0.24 (100mT, 100kHz, 100°C)	CF139 RM8S

Dimensions:

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A1/A2	22.75	23.2	22.3
B1	-	-	9.8
B2	17.3	17.6	17.0
C	8.2	8.35	8.05
D	5.5	5.65	5.35
E	8.4	8.55	8.25
F	19.25	19.7	18.8
G	10.8	11.0	10.6

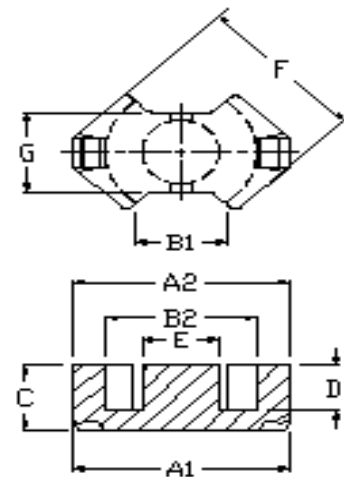

For Cosmo Ferrites Limited-INDIA

Checked By: J.C.
 Approved By: B.S.
 Authorized By: KSR
 Date: 17-09-2022 (ISSUE NO.1)

Customer's Approval

Authorized Signatory:
 Name:
 Date:

NOTE: Please send this Data Sheet back to Cosmo Ferrites Ltd. after approval. If not received back within 15 days, it will be presumed that all the specifications given in the consent/data sheet are acceptable to the concerned.