
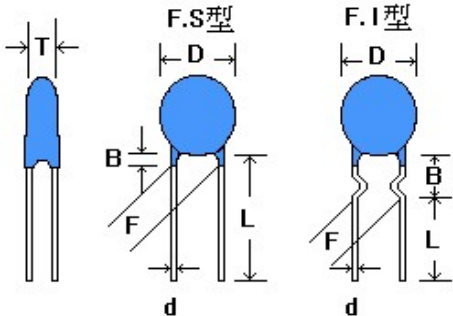



# CINETECH INDUSTRIAL CO., LTD.

## CERAMIC DISC CAPACITORS

### SPECIFICATION FOR APPROVAL

### 承認規格

CUSTOMER 客戶		DATE 日期	2022.07.26	
PART NO. 零件代號	JD331K2GY5PS9LE	description 品名	AC安規電容器 (Y1)	
USED SPEC. 適用規格	V			
		D:	7	MAX
		T:	6	MAX
		F:	9.5 ± 0.8	
		L:	25 ± 2	
		d:	0.56 ± 0.1	
		B:	3 ±	MAX
		COLOR CODE: 顏色	<input type="checkbox"/> 土黃色 <input checked="" type="checkbox"/> EPOXY (藍色)	
SPECIFICATIONS 規格				
RATED CAP. 公稱靜電容量	330	PF	Related Standard	
CAP. TOL. 靜電容量容許差	± 10 %		CSA (Canada)	UL60384-14
TEMP. CHARACT 溫度特性	Y5P		UL (USA)	
INITIAL tan δ 初期 tan δ	2.5 % MAX		VDE (Germany)	DIN EN 60384-14( VDE 0565 Teil 1-1 ):2006-04; EN60384-14:2005-08 IEC 60384-14(ed.3)
Approved Monogram 認證國家	RATED VOLTAGE 額定電壓		SEMKO (Sweden)	EN 60384-14:2005
	X1	Y1	SEV (Switzerland)	IEC 60384 -14(ed.3):05
	400 VAC		FIMKO (Finland)	EN 60384-14:2005
			NEMKO (Norway)	EN 60384-14:2005
VLOTAGE PROOF 耐電壓	BETWEEN TERMINALS 端子間		DEMKO (Denmark)	EN 60384-14:2005
RATED VOLTAGE 額定電壓	400 VAC	<b>AC 4000V</b> FOR 60 SEC	FIMKO CB	IEC 60384-14:2005
INITIAL 初期絕緣電阻 INSULATION RESISTANCE	10,000	MΩ MIN	本公司承認欄	
CUSTOMER'S SIGNATURE 貴公司承認欄		Approval 核決	Chief 審核	Inspector 檢驗
		111.7.26	111.7.26	